


# HITECH Cable Management System

## 12.4.2. 90° Bend Cable Tray

#### **Product Overview:**

Hitech provides 90° cable tray with standard diameter for industrial and commercial applications of 4mm and 5mm, depending on the load requirement. They are particularly suited for applications where frequent changes in cabling are expected or where airflow around cables is essential. Wire mesh cable trays are designed to support and manage electrical cables in data centers, industrial facilities, and commercial buildings. The open-grid design ensures excellent ventilation and reduces heat buildup, extending the lifespan of cables.

At Hitech, 90° cable tray bend are available in a variety of widths, from 50mm up to 900mm or more as per customer requirements, to accommodate different cable bundle sizes and flange height ranges from 50mm to 150mm, selected based on the required cable capacity. This design meets industry standards (e.g., NEMA VE-1, IEC 61537) for load-bearing capacity, fire resistance, and durability. This design makes it easy for technicians to access cables for troubleshooting, adding cables, or replacing damaged sections. This enable efficient heat management, which is critical in facilities with high-density cabling like data centers and control rooms

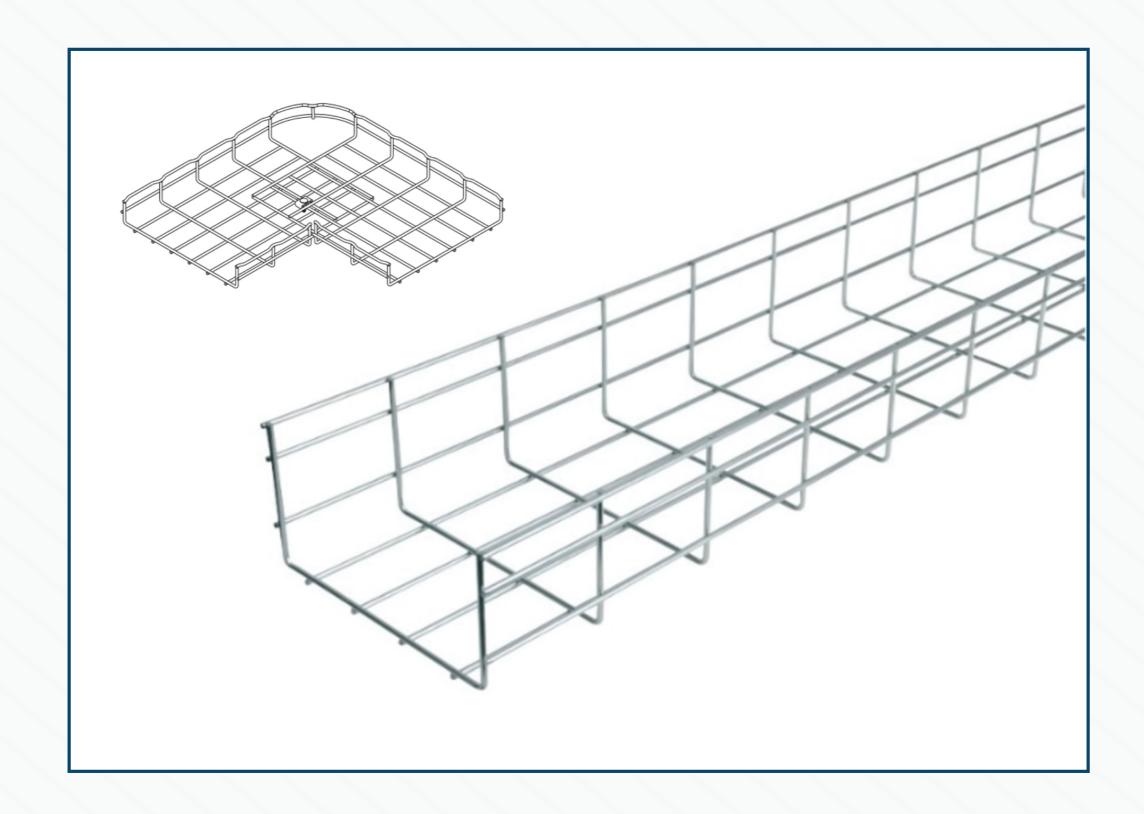

### **Technical Specifications:**

Material	Hot Rolled Steel Sheet to BS 1449
Strength	Wire Diameter 4 mm & 5mm

### **Applications:**


- Commercial Buildings
- Industrial Facilities.
- Telecommunications Sector
- Oil & Gas and Offshore Platforms
- Renewable Energy Installations
- Educational and Institutional Buildings
- Healthcare Facilities

#### **Features:**

- Corrosion Resistance
- Ease of Maintenance
- Enhanced Airflow and Heat Dissipation
- Efficient Cable Management
- Durability
- Safety and Reliability
- Fire Safety Compliance
- Noise Reduction

## 12.4.2.2. High Reinforced Thickness-90 Degree Cable Tray Bend

Product Code	Tray Type	H (mm)	W (mm)	Th (mm)	*Note:
HTM90B50/300-5	C/G	50	300	5	ပ္ပ
HTM90B100/300-5	C/G	100	300	5	stomi
HTM90B100/350-5	C/G	150	350	5	zed S
HTM90B75/400-5	C/G	100	400	5	izes
HTM90B100/400-5	C/G	150	400	5	are A
HTM90B50/450-5	C/G	100	450	5	vailable
HTM90B150/450-5	C/G	150	450	5	ole
HTM90B150/500-5	C/G	150	500	5	
HTM90B150/600-5	C/G	150	600	5	
HTM90B150/700-5	C/G	150	700	5	
HTM90B150/800-5	C/G	150	800	5	

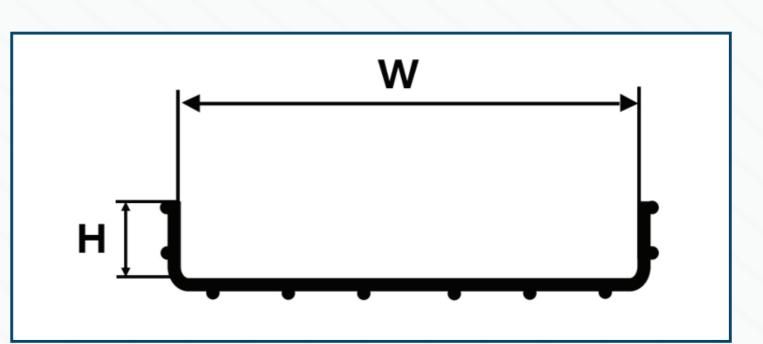

Tray Type				
C-Shaped	G-Shaped			

Coating Types			
HDG	Hot Dip Galvanized		
GI	Pre-Galvanized		
AL	Aluminum		
P. C.	Powder Coated		

