

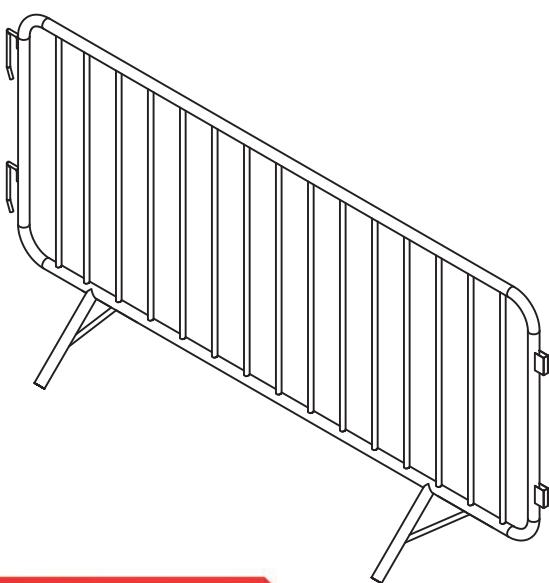


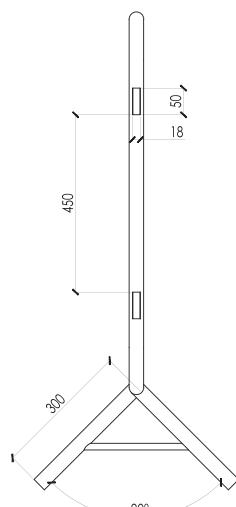

HiTemp Crowd Barrier

HI-TEMPORARY FENCING SYSTEM

- 1** Easy to Deploy
- 2** Robust Solution
- 3** Light Weight Design
- 4** Smart Weld Technology

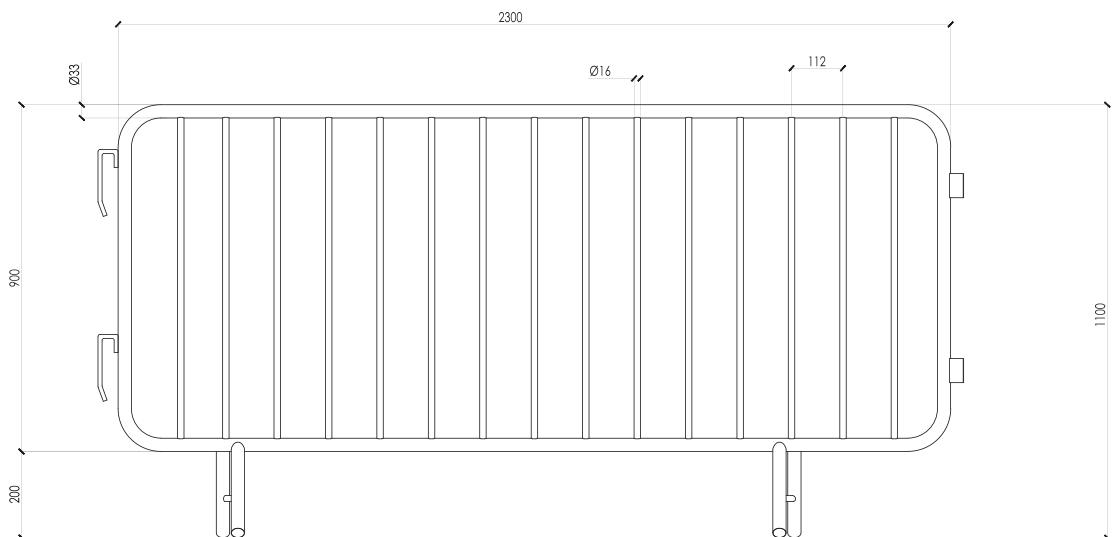

HiTemp Crowd Barrier

HI-TEMPORARY FENCING SYSTEM

FINISH

- Hot dip galvanized to BS EN 1461
- Hot dip galvanized and powder coated to BS EN 13438
- Marine coat Coating for application near salt water



SUITABLE

- Residential area
- Industry
- Event Management
- Temporary Enclosure
- Construction sites
- Emergency situations
- Sports Venue
- Public Works



FEATURES

- 100% Stronger
- 100% Tested
- 100% Traceable
- 100% Strengthened
- Heavy Duty Anti-Climb Panel
- Impact resistant its mesh size prevents climbing
- Max. Wind speed Open Side 21.46 Mph(9.59 m/s)
- Good colour stability

+966 11 474 8635 

www.hitech.sa
sales@hitech.sa 



Building no 3824, Nira Street, 2nd
Industrial area, Riyadh 14338 RSNB3824 

HiTemp Crowd Barrier

HI-TEMPORARY FENCING SYSTEM



Installation:

At HITECH Fencing, we provide comprehensive support throughout every stage of your project. We design and manufacture the perfect Crowd Barrier to meet your specific requirements. Our team of fencing solution experts is always at your service to provide guidance and recommendations. With our assistance, you can enjoy the benefits of safe and secure fencing efficiently and effectively. Your satisfaction and safety are our top priorities.

Description:

The HiTemp Heras Fencing system is highly sought-after for indoor and outdoor events such as exhibitions and sports events. Known for their portability and lightweight design, these panels are exceptionally robust, effectively managing pedestrian walkways, vehicular access, and parking areas.

HiTemp Crowd Barrier: Strength and Versatility

Available in two variants:

- **19 bars** for maximum robustness
- **16 bars** for optional strength and flexibility.

Key Features

- Sturdy feet to prevent tipping.
- Safety hooks for easy linking to interconnected barriers.

+966 11 474 8635 

www.hitech.sa
sales@hitech.sa 



Building no 3824, Nira Street, 2nd
Industrial area, Riyadh 14338 RSNB3824 



HiTemp Crowd Barrier

HI-TEMPORARY FENCING SYSTEM

Accessories:

The concrete base, the steel base, penal connector, light duty brace support, heavy duty brace support, privacy screen

To ensure structural integrity, our frames are anchored with 200x200mm concrete footings, reaching a depth of 600mm. Frame connections are fortified with a robust coupler, consisting of two 3mm thick sheets, firmly secured using an M16 bolt for a secure grip. The mesh wires are meticulously joined at every intersection using smart welding technology, enhancing both durability and security

PANEL DIAMENSIONS	DETAILS
Pipe Diameter	33mm (for Frame) (System available as per customer requirement)
Frame Size	1100 mm x 2300 mm
Spacing	112mm, 133mm
Dimensions	16mm
Standard Color	White (RAL 9003) (Other colors are also available on request)
No of Bars	18, 15
COATING TYPES	
95% zinc — SP aluminum coated	Electrostatic polyester coated
Hot dip Galv. coated	PVC coated

+966 11 474 8635

www.hitech.sa
sales@hitech.sa



Building no 3824, Nira Street, 2nd
Industrial area, Riyadh 14338 RSNB3824