

HITECH Cable Management System

12.1.1. Straight Cable Tray


Product Overview:

Perforated cable trays are designed to support various load capacities. Industries requiring heavy-duty support, manufacturing or data centers, can opt for trays with increased thickness and structural reinforcements. Hitech provides standard thickness for industrial applications that ranges from 1mm to 2mm, depending on the load requirement.

Perforated cable trays are crucial in industrial settings where organized and safe cable management is needed. These trays offer robust support, efficient ventilation, and easy access, making them an ideal choice across a wide range of industries, from manufacturing to telecommunications. Here's an overview of typical features, specifications, materials, and options for industrial applications:

Perforated cable trays are metal trays with a series of uniform holes (perforations) along their base and sides. These perforations provide excellent support for cables while allowing ventilation to reduce heat buildup. The trays can handle both power and data cables, preventing cable sagging and promoting a clean, organized environment.

At Hitech, Cable trays are available in a variety of widths, from 150mm up to 1000mm or more, to accommodate different cable bundle sizes and flange height ranges from 50mm to 100mm, selected based on the required cable capacity. Standard lengths are usually 2.4 meters and 3 meters, but custom lengths can be requested. Perforation designs allow for flexible cable fixing options and enhanced ventilation. Our Design meets industry standards (e.g., NEMA VE-1, IEC 61537) for load-bearing capacity, fire resistance, and durability. This design makes it easy for technicians to access cables for troubleshooting, adding cables, or replacing damaged sections. Perforations enable efficient heat management, which is critical in facilities with high-density cabling like data centers and control rooms

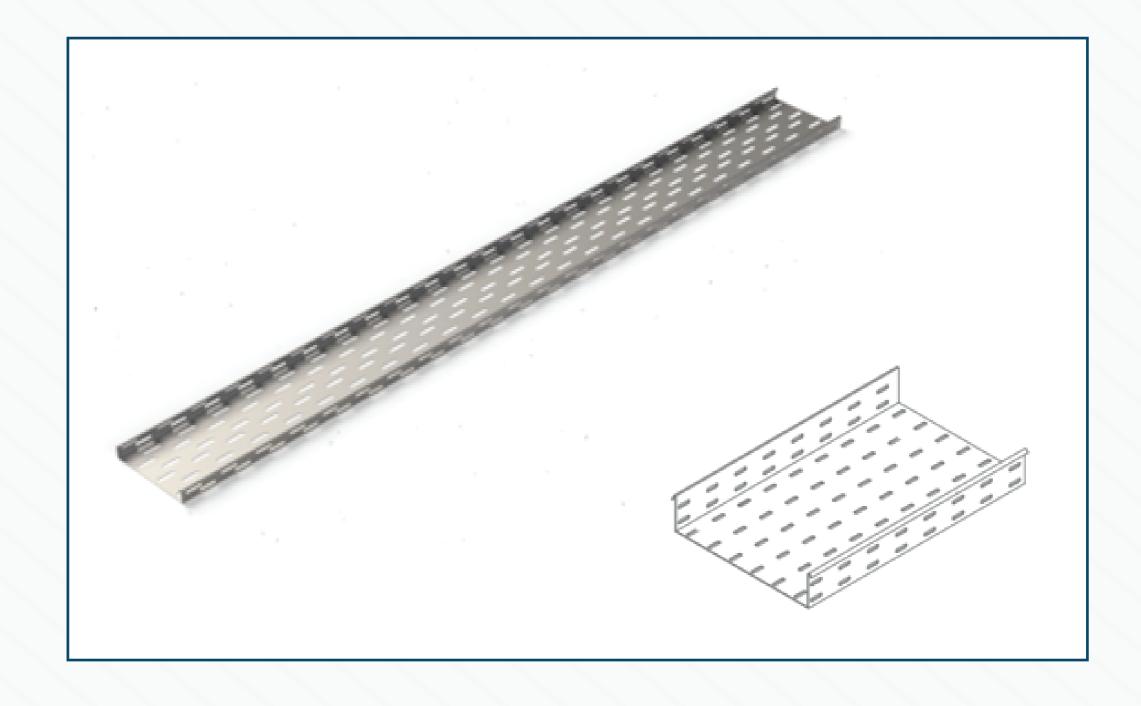

Features:

- Corrosion Resistance
- Ease of Maintenance
- Enhanced Airflow and Heat Dissipation
- Efficient Cable Management
- Durability
- Safety and Reliability
- Fire Safety Compliance
- Noise Reduction

Applications:


- Commercial Buildings
- Industrial Facilities.
- Telecommunications Sector
- Oil & Gas and Offshore **Platforms**
- Renewable Energy Installations
- Educational and Institutional Buildings
- Healthcare Facilities


Technical Specifications:

Material	Hot Rolled Steel Sheet to BS 1449
Strength	Light, Medium and Heavy Duty

12.1.1.2. Medium Duty-Straight Cable Tray (Thickness:1.5 mm)

Product Code	Tray Type	H (mm)	W (mm)	Th (mm)	L (m)	*Note:
HTPS50/200-15	IF/PL	50	200	1.5	2.44/3	
HTPS75/200-15	IF/PL	75	200	1.5	2.44/3	Cust
HTPS100/200-15	IF/PL	100	200	1.5	2.44/3	ustomi
HTPS75/250-15	IF/PL	50	250	1.5	2.44/3	zed
HTPS50/250-15	IF/PL	75	250	1.5	2.44/3	Size
HTPS75/250-15	IF/PL	100	250	1.5	2.44/3	es are
HTPS50/300-15	IF/PL	50	300	1.5	2.44/3	
HTPS75/300-15	IF/PL	75	300	1.5	2.44/3	Availa
HTPS100/300-15	IF/PL	100	300	1.5	2.44/3	able

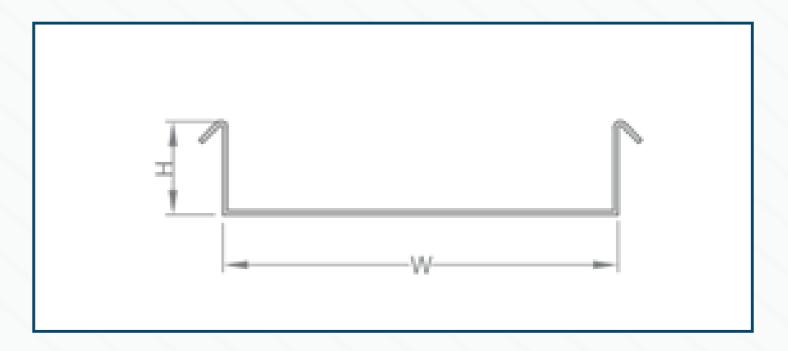

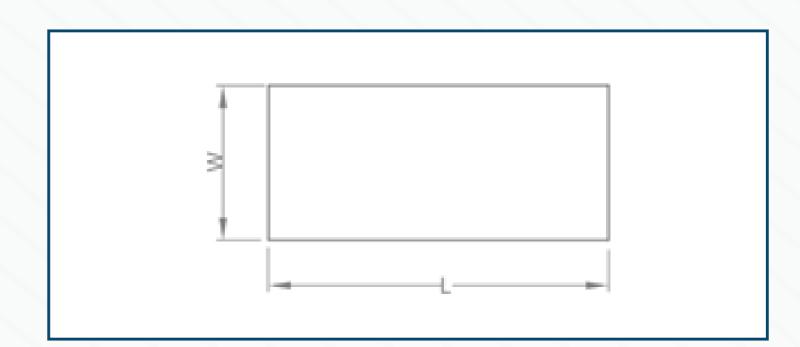

Coating Types					
HDG	Hot Dip Galvanized				
GI	Pre-Galvanized				
AL	Aluminum				
P. C.	Powder Coated				

Tray Type						
Inside Flanged (IF)	Plain (PL)					



